(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 1 April 2004 (01.04.2004)

PCT

(10) International Publication Number WO 2004/026500 A3

(51) International Patent Classification7: E21B 23/00,

(21) International Application Number:

PCT/US2003/025675

(22) International Filing Date: 18 August 2003 (18.08.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/412.544

20 September 2002 (20.09.2002) US

(71) Applicant (for all designated States except US): ENVEN-TURE GLOBAL TECHNOLOGY [US/US]; 16200 A. Park Row, Houston, TX 77084 (US).

(72) Inventors; and


(75) Inventors/Applicants (for US only): SHUSTER, Mark

[US/US]; 19115 Prospect Ridge Lane, Houston, TX 77094 (US). RING, Lev [US/US]; 14126 Heatherhill Place, Houston, TX 77077 (US).

- (74) Agent: MATTINGLY, Todd; Haynes and Boone, LLP, Suite 3100, 901 Main Street, Dallas, TX 75202 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FL GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE. SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ. VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: SELF-LUBRICATING EXPANSION MANDREL FOR EXPANDABLE TUBULAR

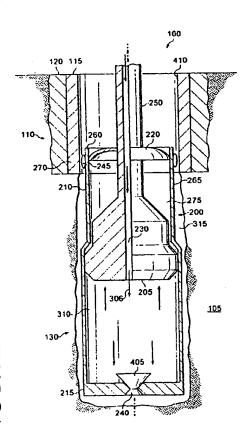

(57) Abstract: A self-lubricating expansion mandrel (205) includes a system for lubricating the interface between the self-lubricating expansion mandrel (205) and a tubular member (210) during the radial expansion of the tubular member (210).

WO 2004/026500 A3 |||||||||||||

WO 2004/026500 A3

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, (88) Date of publication of the international search report: GA. GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Published:

with international search report

13 January 2005

(15) Information about Correction:

Previous Correction:

see PCT Gazette No. 43/2004 of 21 October 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazene.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/25675

A OLI	COLET CATTON OF CITE POR NATIONAL				
A. CLASSIFICATION OF SUBJECT MATTER					
IPC(7) : E21B 23/00, 43/10 US CL : 166/207, 55.7					
US CL: 166/207, 55.7 According to International Patent Classification (IPC) or to both national classification and IPC					
B. FIELDS SEARCHED					
Minimum documentation scarched (classification system followed by classification symbols)					
U.S.: 166/207, 55.7, 50, 55, 55.1, 205, 209, 216, 242.1, 297, 380, 384					
Documentati	Dogumentation courselyd other than minimum degree to the state of the				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched					
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)					
	ontinuation Sheet				
C NOCHE GENER CONCENTED TO DE DOLONGENO					
C. DOCUMENTS CONSIDERED TO BE RELEVANT Category * Citation of document, with indication, where appropriate, of the relevant passages Relevant to claim No.					
Category *			Relevant to claim No.		
X	US 2002/0062956 A1 (MURRAY et al.) 30 May 20	002 (30.5.2002), whole document	1-9		
 Y		·	10.22		
			10-23		
Y	US 5,014,779 A (MELING et al) 14 May 1991 (14	(05 1991) column 3 lines 31-26	19-23		
•			15-23		
Y	US 4,526,839 A(HERMAN et al) 2 July 1985 (02.	07.1985), column 5, line 60- column 6.	10-18, 23		
	line 16.	,, ,	,		
Α	US 6,325,148 B1 (TRAHAN et al) 4 December 200	01, (04.12.2001), whole document	1-23		
	-	-			
Α	US 3,203,451 A(VINCENT) 31 August 1965 (31.0	8.1965), whole document.	1-23		
	110 C 150 062 A (HOLLED 1) 10 D	2 (12 12 0000) 1 -1	1.00		
A US 6,158,963 A (HOLLIS et al) 12 December 2000 (12.12.2000), whole document.			1-23		
A	US 4,505,987 A (YAMADA et al.) 19 March 1985	(19.03.1985) whole document	1-23		
rı,	OF TOURS IN (I MILLION CE IL.) IS MILLE 1900	(12.02.1202), whose document.	1-23		
		ľ			
		1			
Friether	documents are listed in the continuation of Box C.	See patent family annex.			
* Special categories of cited documents: T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the					
	defining the general state of the art which is not considered to be	principle or theory underlying the inven			
or particu	lar relevance	"X" document of particular relevance; the ci	laimed invention cannot be		
"E" earlier ap	plication or patent published on or after the international filing date	considered novel or cannot be considered			
"L" document	which may throw doubts on priority claim(s) or which is cited to	when the document is taken alone			
establish t	he publication date of another citation or other special reason (as	"Y" document of particular relevance; the considered to involve on invention stem			
specified)		considered to involve an inventive step combined with one or more other such			
"O" document	referring to an oral disclosure, use, exhibition or other means	being obvious to a person skilled in the			
	published prior to the international filing date but later than the	"&" document member of the same patent fa	mily		
priority date claimed					
Date of the actual completion of the international search Date of mailing of the international search report 25 MAY 2004					
	2002 (11 12 20)2)	25 M/	AY ZUU&		
11 December 2005 (11.12.2005)					
Name and mailing address of the ISA/US Mail Stop PCT, Aun: ISA/US ARROSIZED OFFICE ARROSIZED OFFICE					
Commissioner for Patents		David J. Baggell			
P.O. Box 1450		Telephone No. (703) 308-1113			
7 Softwaren, 17 Species 2-2 of 195					
Facsimile No. (703) 305-3230					

Form PCT/ISA/210 (second sheet) (July 1998)

INTERNATIONAL SEARCH REPORT	PCT/US03/25675			
·				
·				
Continuation of B. FIELDS SEARCHED Item 3:				
JPO, EPO, Derwent Terms: swedge/swage, hibricate/lubricant, teflon, friction, coating,				
·				
Form PCT/ISA/210 (second sheet) (July 1998)				

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



. | 1811 | 1818 | 1818 | 1818 | 1818 | 1818 | 1818 | 1818 | 1818 | 1818 | 1818 | 1818 | 1818 | 1818 | 1818 | 1

(43) International Publication Date 1 April 2004 (01.04.2004)

PCT

(10) International Publication Number WO 2004/026500 A3

(51) International Patent Classification⁷: 43/10

E21B 23/00,

(21) International Application Number:

PCT/US2003/025675

- (22) International Filing Date: 18 August 2003 (18.08.2003)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/412.544

20 September 2002 (20.09.2002) US


- (71) Applicant (for all designated States except US): ENVENTURE GLOBAL TECHNOLOGY [US/US]; 16200 A. Park Row. Houston, TX 77084 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SHUSTER, Mark

[US/US]: 19115 Prospect Ridge Lane, Houston, TX 77094 (US). RING, Lev [US/US]: 14126 Heatherhill Place. Houston, TX 77077 (US).

- (74) Agent: MATTINGLY, Todd: Haynes and Boone, LLP, Suite 3100, 901 Main Street, Dallas, TX 75202 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH. GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, TT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: SELF-LUBRICATING EXPANSION MANDREL FOR EXPANDABLE TUBULAR

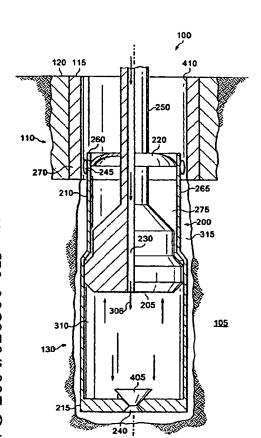

(57) Abstract: A self-lubricating expansion mandrel (205) includes a system for lubricating the interface between the self-lubricating expansion mandrel (205) and a tubular member (210) during the radial expansion of the tubular member (210).

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report
- with amended claims
- (88) Date of publication of the international search report: 13 January 2005

Date of public of the amended claims: 24 February 2005

(15) Informat. about Correction:

Previous Correction:

see PCT Gazette No. 43/2004 of 21 October 2004, Section Π

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

AMENDED CLAIMS

[received by the International Bureau on 23 July 2004 (23.07.2004); claims 24-47 added

- 17. The self-lubricating expansion mandrel of claim 12, wherein the solid lubricant retained in the plurality of troughs formed in a textured pattern comprises a thermo-sprayed coating.
- 18. The self-lubricating expansion mandrel of claim 12, wherein the depth of the plurality of troughs formed in a textured pattern is in a range of between about 50 and 150 microns.
- A self-lubricating expansion mandrel for expanding a tubular member, comprising:

 a housing including a tapered outer surface;

 one or more grooves formed in the tapered outer surface; and

 a grease supply chamber in the housing;

 a conduit from the grease supply chamber to one or more of the grooves; and

 means for forcing grease from the grease supply chamber trough the conduit to one or more of the
- grooves.

 20. The self-lubricating expansion mandrel of claim 19, wherein the one or more grooves comprise circumferential grooves.
- 21. The self-lubricating expansion mandrel of claim 19, wherein the grooves comprise axial grooves.
- 22. The self-lubricating expansion mandrel of claim 19, wherein the grooves comprise a pattern of grooves with both an axial and a circumferential component.
- 23. The self-lubricating expansion mandrel of claim 22, wherein the pattern of grooves comprises a textured surface.
- A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the grooves comprise circumferential grooves.
- 25. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the grooves comprise axial grooves.
- 26. A self-lubricating expansion mandrel for expanding a tubular member, comprising:
 a housing including a tapered outer surface;
 one or more grooves formed in the tapered outer surface; and
 solid lubricant retained in one or more of the grooves;
 wherein the grooves comprise a pattern of grooves with both an axial and a circumferential component.
- 27. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and

solid lubricant retained in one or more of the grooves; wherein the pattern of grooves comprises a textured surface.

- 28. A self-hubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the depth of the grooves is in a range of between about 1 and 4 microns.
- 29. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the depth of the grooves is in a range of between about 10 and 50 microns.
- 30. A self-lubricating expansion mandrel for expanding a tubular member, comprising:
 a housing including a tapered outer surface;
 one or more grooves formed in the tapered outer surface; and
 solid lubricant retained in one or more of the grooves;
 wherein the solid lubricant retained in one or more of the grooves comprises a thermo-sprayed coating.
- 31. A self-lubricating expansion mandrel for expanding a tubular member, comprising: a housing including a tapered outer surface; one or more grooves formed in the tapered outer surface; and solid lubricant retained in one or more of the grooves; wherein the depth of the grooves is in a range of between about 50 and 150 microns.
- 32. A self-lubricating expansion device for expanding a tubular member, comprising:
 a housing including a tapered outer surface;
 one or more depressions formed in the tapered outer surface; and
 a lubricant supply chamber in the housing;
 a conduit from the lubricant supply chamber to one or more of the depressions; and
 means for forcing lubricant from the lubricant supply chamber trough the conduit to one or more of the
 depressions.
- 33. The self-lubricating expansion mandrel of claim 32, wherein the one or more depressions comprise circumferential grooves.
- 34. The self-hibricating expansion mandrel of claim 32, wherein the depressions comprise axial grooves.
- 35. The self-lubricating expansion mandrel of claim 32, wherein the depressions comprise a pattern of grooves with both an axial and a circumferential component.

36. The self-lubricating expansion mandrel of claim 35, wherein the pattern of grooves comprises a textured surface.

- 37. A self-lubricating expansion device for expanding a tubular member, wherein the interface between the expansion device and the tubular member, during the expansion process, includes a leading edge portion and a trailing edge portion, comprising:
- a housing including a tapered outer surface;
- one or more first depressions formed in the leading edge portion of the tapered outer surface; and a lubricant supply chamber in the housing;
- a conduit from the lubricant supply chamber to one or more of the first depressions;
- means for forcing lubricant from the lubricant supply chamber trough the conduit to one or more of the depressions;

one or more second depressions formed in the trailing edge portion of the tapered outer surface; and a solid lubricant provided within one or more of the second depressions.

- 38. The self-lubricating expansion mandrel of claim 37, wherein one or more of the first and second depressions comprise circumferential grooves.
- 39. The self-lubricating expansion mandrel of claim 37, wherein one or more of the first and second depressions comprise axial grooves.
- 40. The self-lubricating expansion mandrel of claim 37, wherein one or more of the first and second depressions comprise a pattern of grooves with both an axial and a circumferential component.
- 41. The self-lubricating expansion mandrel of claim 40, wherein the pattern of grooves comprises a textured surface.
- 42. A method of lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

injecting a fluid lubricant into the leading edge portion; and providing a solid lubricant in the trailing edge portion.

A system for lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

means for injecting a fluid lubricant into the leading edge portion; and means for providing a solid lubricant in the trailing edge portion.

44. A method of lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the

expansion device and the tubular member comprises a leading eds portion and a trailing edge portion, comprising:

providing a supply of a fluid lubricant within the expansion device; and injecting the fluid lubricant into the leading edge portion.

45. A system for lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

means for providing a supply of a fluid lubricant within the expansion device; and means for injecting the fluid lubricant into the leading edge portion.

46. A method of lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

providing a supply of a solid lubricant on the expansion device within the trailing edge portion.

47. A system for lubricating the interface between and expansion device and a tubular member during an expansion of the tubular member using the expansion device, wherein the interface between the expansion device and the tubular member comprises a leading edge portion and a trailing edge portion, comprising:

means for providing a supply of a solid lubricant on the expansion device within the trailing edge portion.